

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-180220

(43)Date of publication of application : 03. 07. 2001

(51)Int. CI. B60C 9/00
B60C 9/22
D02G 3/48

(21)Application number : 11-366062 (71)Applicant : YOKOHAMA RUBBER CO LTD:THE


(22)Date of filing : 24. 12. 1999 (72)Inventor : UEDA YOSHIO

(54) PNEUMATIC RADIAL TIRE

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a pneumatic radial tire allowing improvement in high-speed durability and high-frequency road noise.

SOLUTION: This pneumatic radial tire uses an organic fiber cord of a small elongation percentage before vulcanizing a tire (under a load of 0.02 N/dtex) and 2.0-7.0% shrinkage percentage per original length when taken out of the tire after the vulcanization as a reinforcement cord 7 for belt reinforcement layers 5, 6 spirally wound in the substantial tire circumferential direction on the road surface side of the belt layer 2.

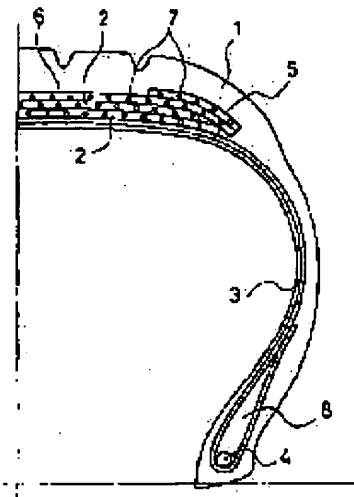

LEGAL STATUS

[Date of request for examination] 16. 06. 2005

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's

decision of rejection]
[Date of requesting appeal against
examiner's decision of rejection]
[Date of extinction of right]

Copyright (C); 1998, 2003 Japan Patent Office